

ProMixSealer® ALV sealing compound

LEADER IN HIGH TEMPERATURE SOLUTIONS



CONTACT

INSULCON B.V. – The Netherlands
+31 (0) 167 565750
info@insulcon.com

KERAMAB N.V. – Belgium
+32 (0) 3 711.02.78
sales@keramab.com

INSULCON GMBH - Germany
+49 (0) 2131 408548-0
insulcongmbh@insulcon.com

INSULCON PROJECTS S.A. - Switzerland
+41 (0)91 911739
infos@insulcon.com




Sealing off collector bars at the outer window in the potcells to prevent air ingress.

Insulcon's **ProMixSealer ALV** is tested and approved as a sealing off collector bars at the outer window in the potcells to prevent air ingress. An effective seal around the collector bars is essential to prevent air ingress from the outside of the pots which causes oxidation of the refractory lining with the pots. In this case, the affected areas cause erosion, and ultimately premature failure, of the refractory materials used to line the pots.

ProMixSealer ALV is an in-house manufactured joint and patching compound, based on body soluble fibers. It has an extremely low thermal shrinkage in combination with excellent strength and superior non-wetting characteristics.

ProMixSealer ALV is suitable for pumping, into the stuffing box to form a seal, with a pneumatic pump system. The sachet package of 1500 ml enables an easy installation and the volume of mould that can be processed during the application process is larger than using a cartridge. The air-pressured pump makes the installation of the ProMixSealer® mould far easier and faster.

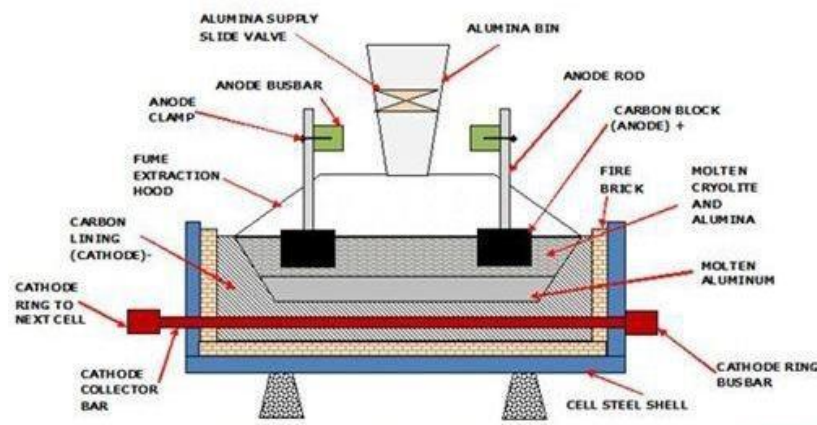

INSULCON

LEADER IN HIGH TEMPERATURE SOLUTIONS

KERAMAB

LEADER IN HIGH TEMPERATURE SOLUTIONS

www.insulcon.com / www.keramab.com